



Combustible Wall Clearances With Heat Shield

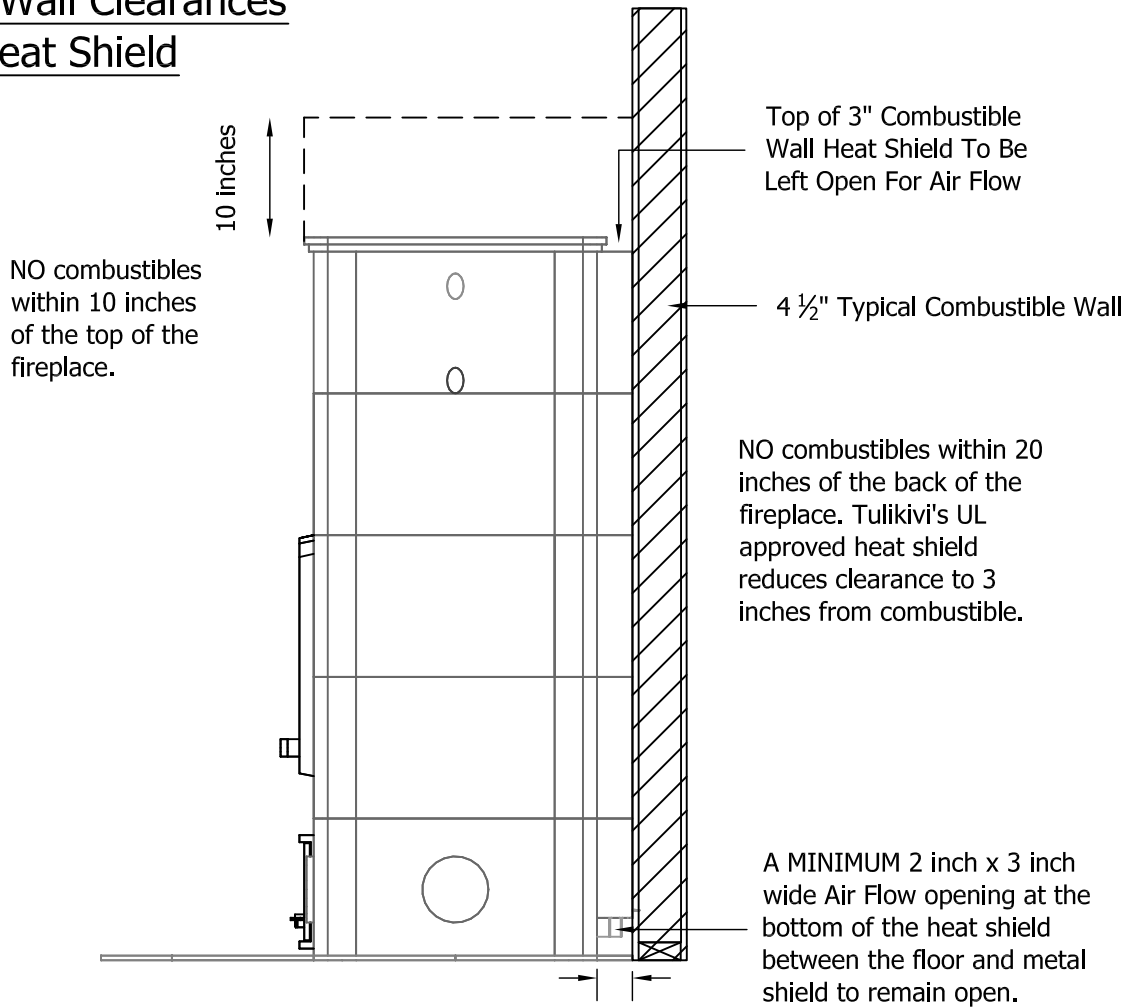

Metal combustible wall heat shield. sides of heat shield covered with soapstone tile.

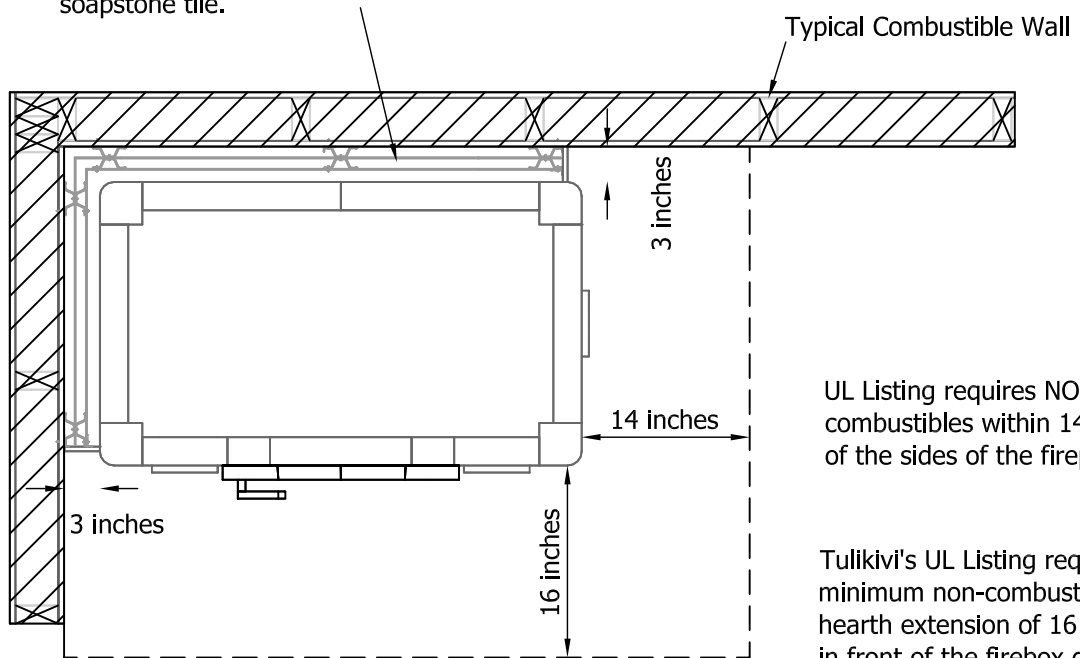

UL Listing requires NO combustibles within 14 inches of the sides of the fireplace

Tulikivi's UL Listing requires minimum non-combustible hearth extension of 16 inches in front of the firebox door and 8 inches beyond either side of the fireplace.