



# Combustible Wall Clearances With Heat Shield

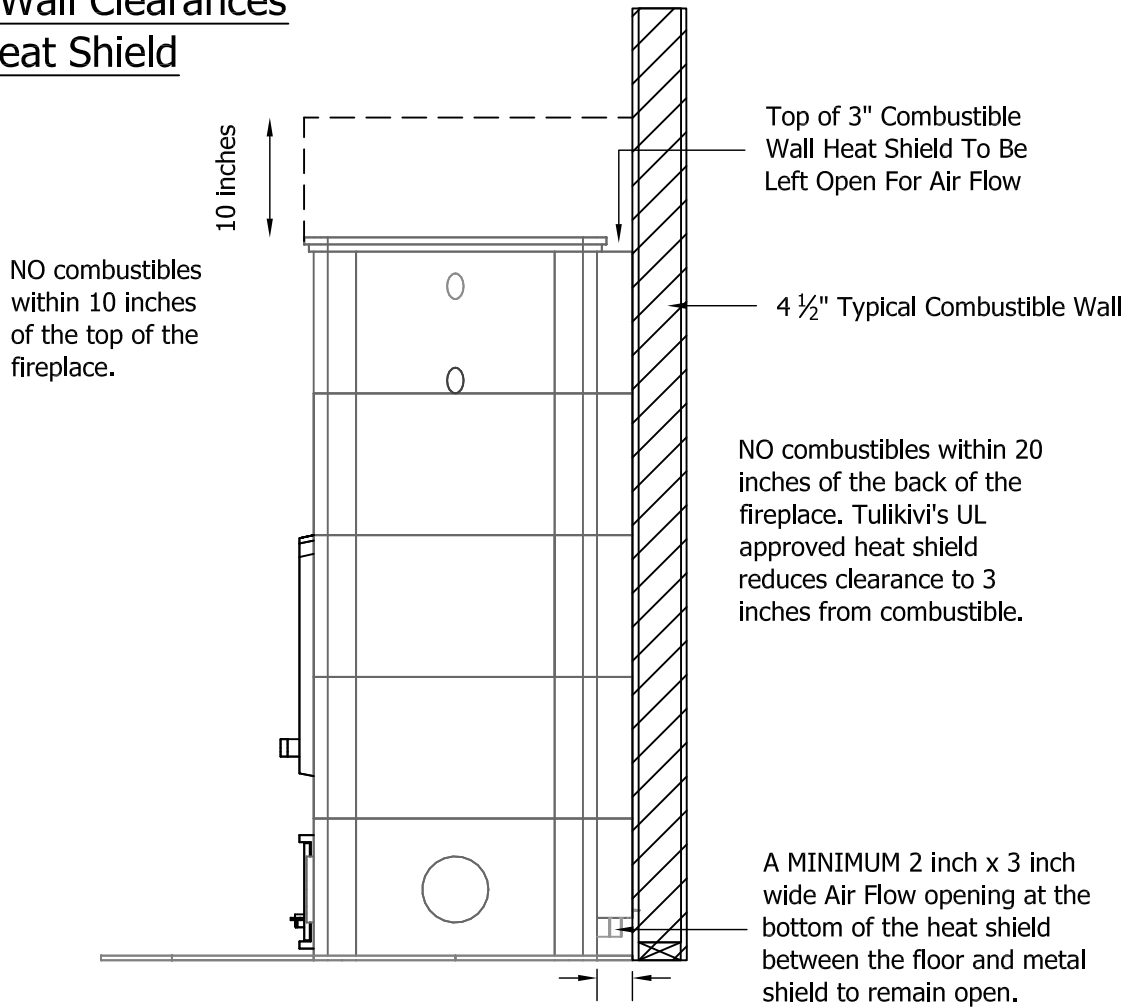

Metal combustible wall heat shield.  
sides of heat shield covered with  
soapstone tile.


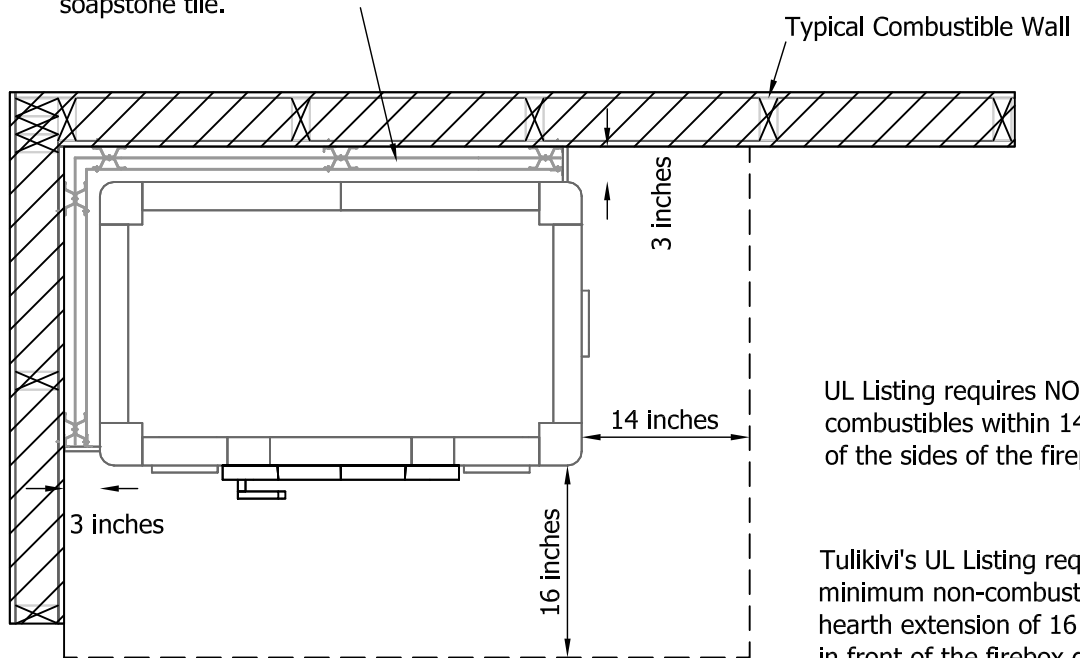


UL Listing requires NO combustibles within 14 inches of the sides of the fireplace

Tulikivi's UL Listing requires minimum non-combustible hearth extension of 16 inches in front of the firebox door and 8 inches beyond either side of the fireplace.

# Combustible Wall Clearances



## NO Heat Shield

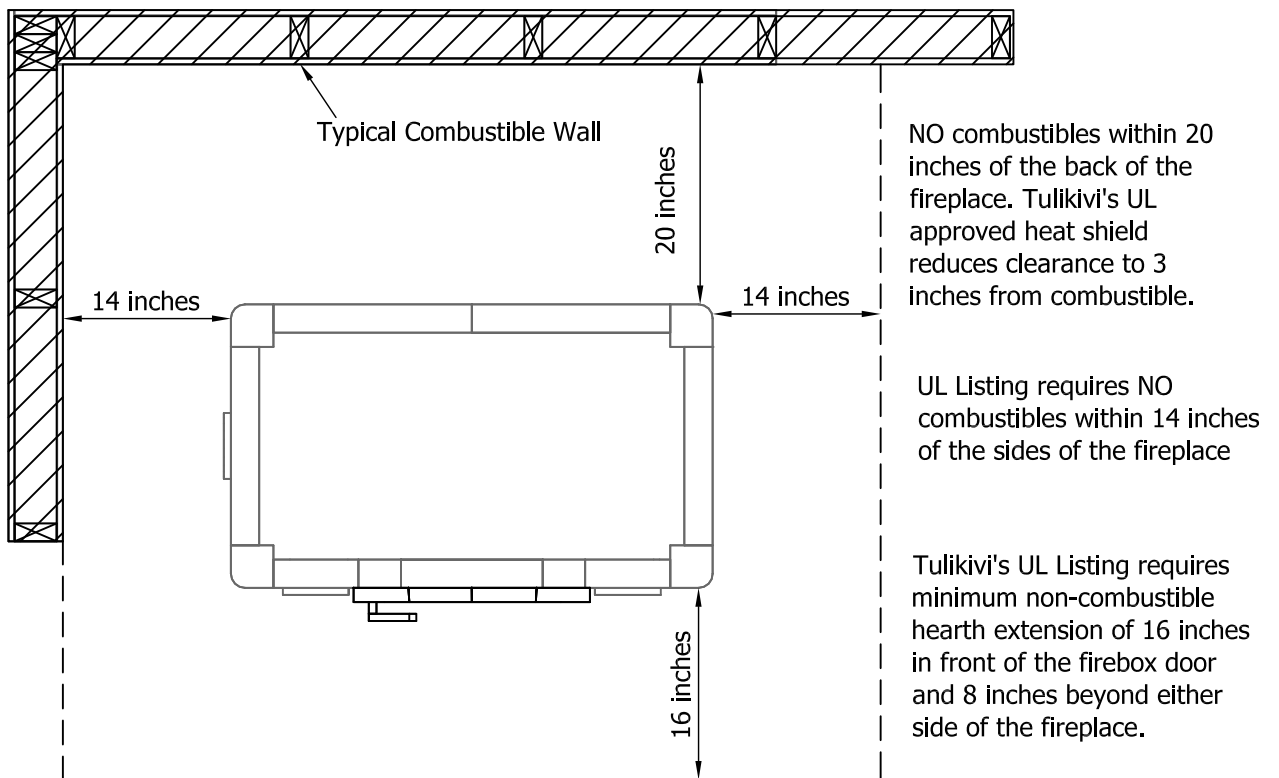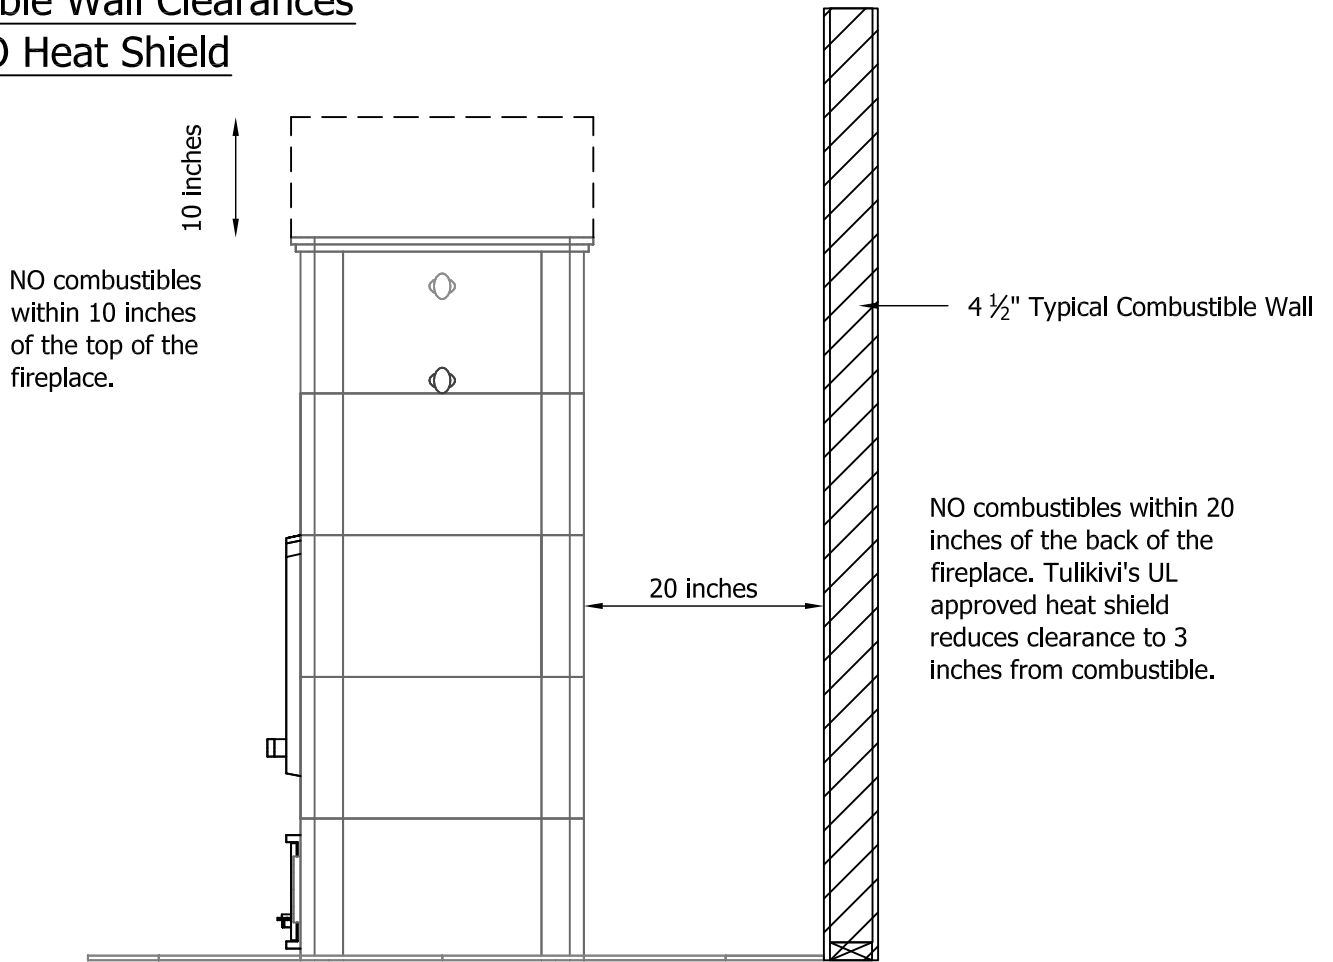


# Through Wall Clearances

## NO Heat Shields


NO combustibles within 10 inches of the top of the fireplace.

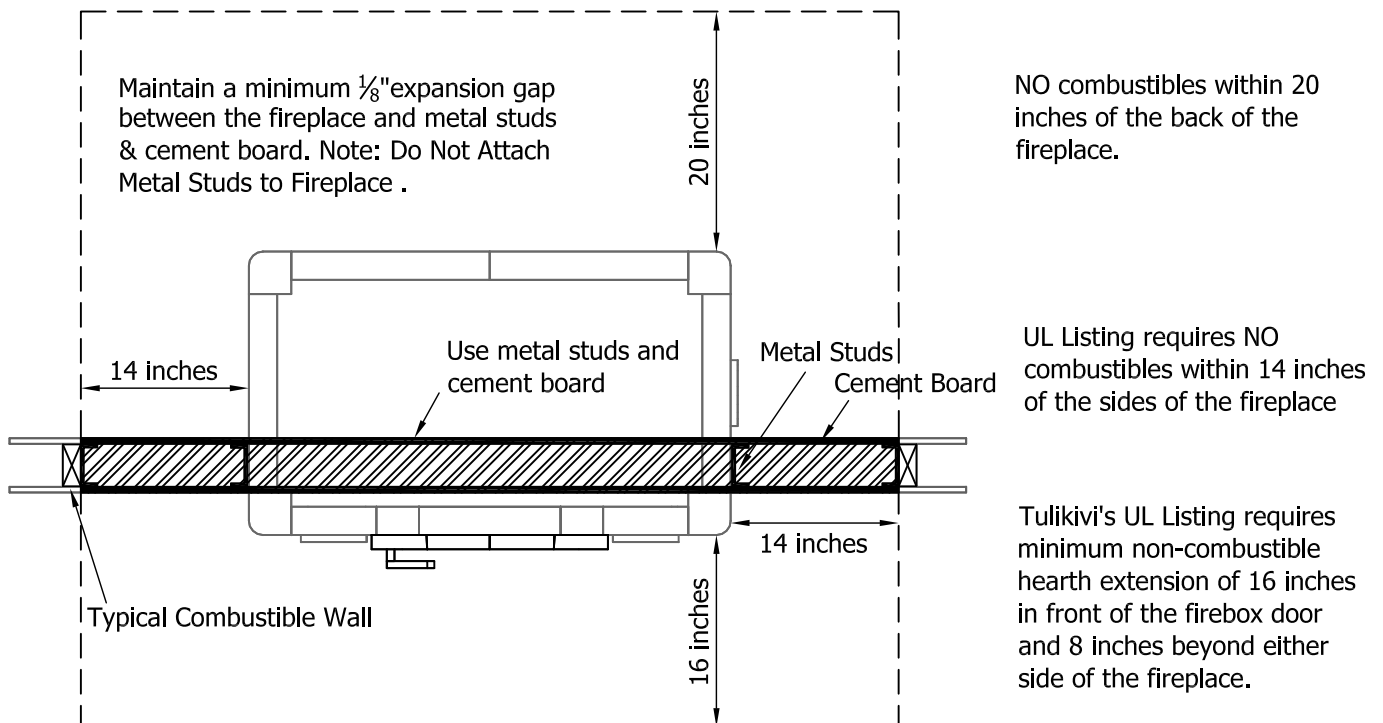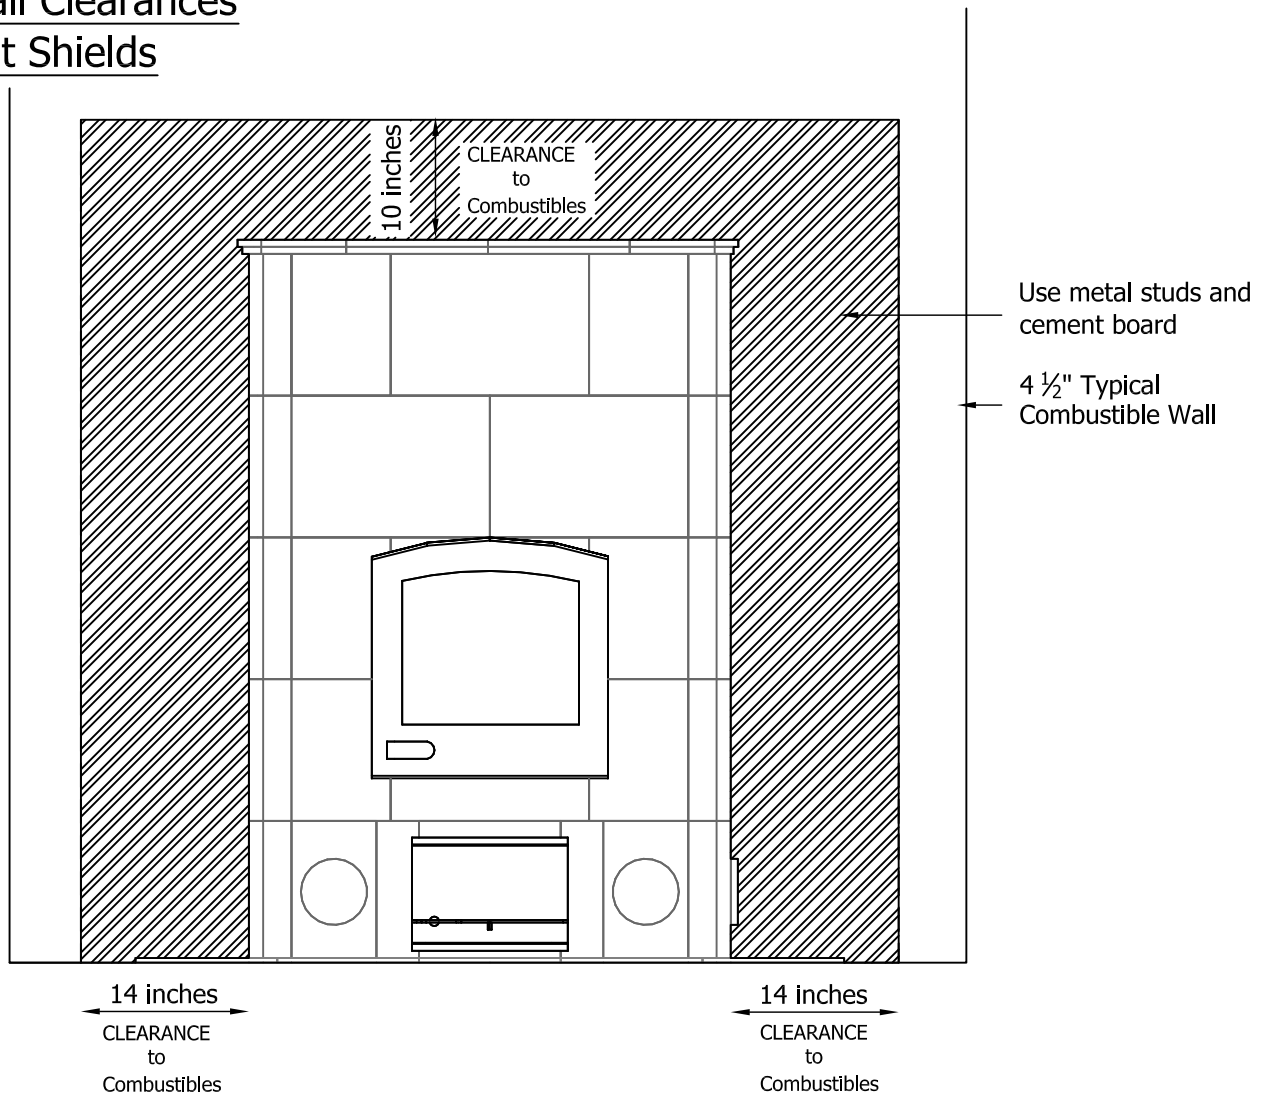

# Non-Combustible Wall Clearances With Heat Shield


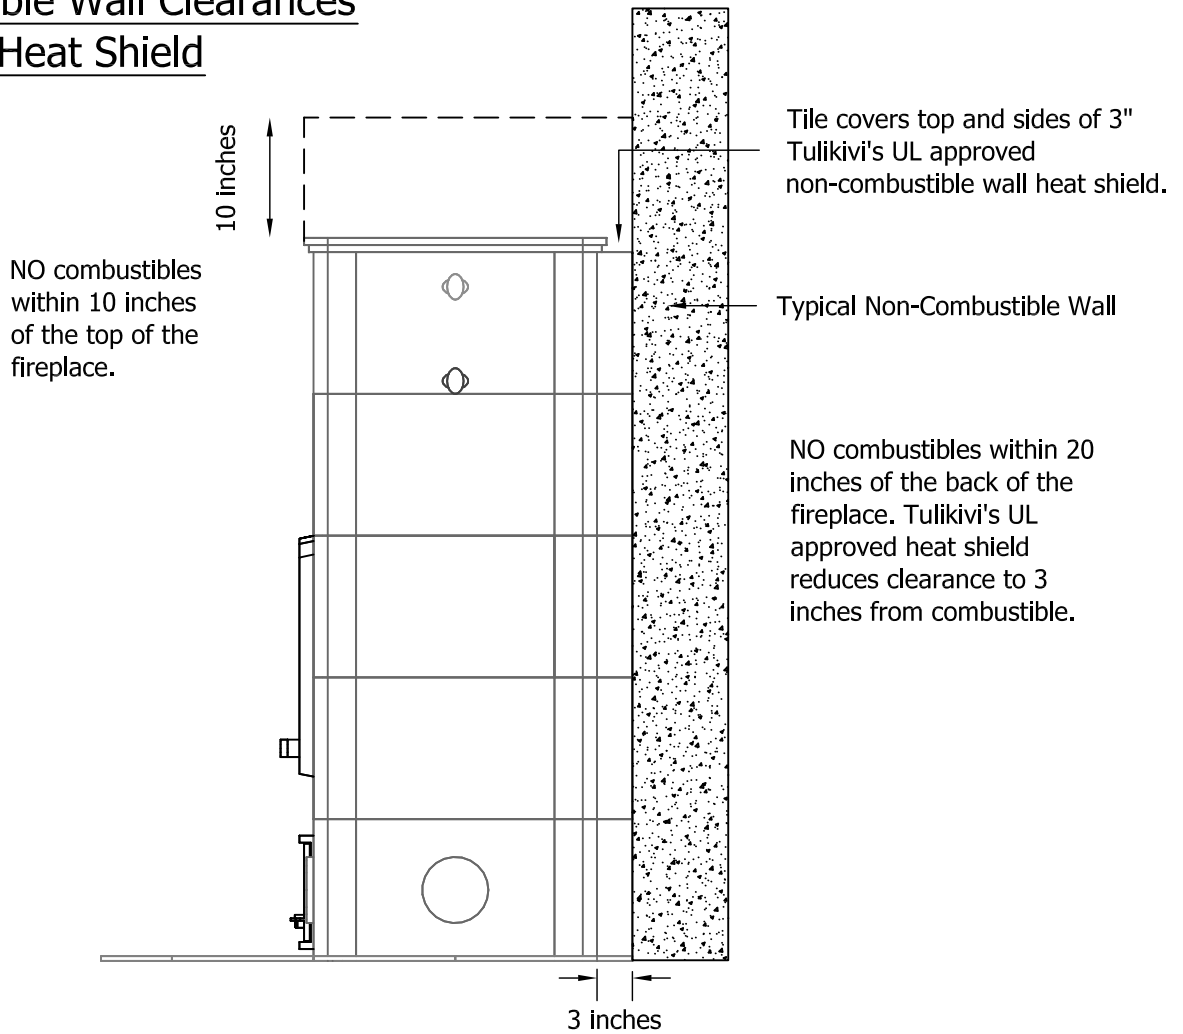


Foamglas non-combustible wall heat shield.  
Top and sides of heat shield covered with soapstone tile.

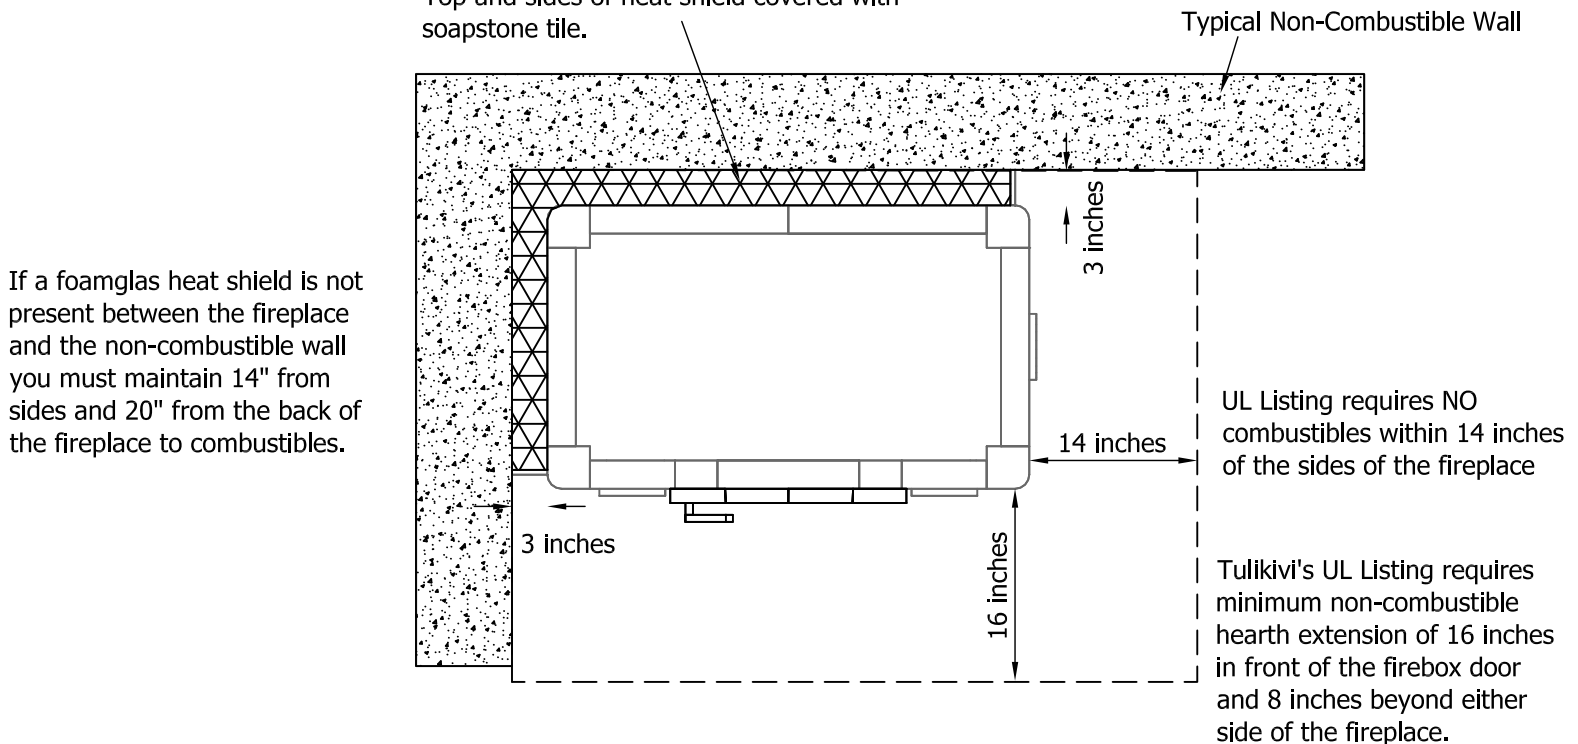

# Non-Combustible Wall Clearances


## NO Heat Shield

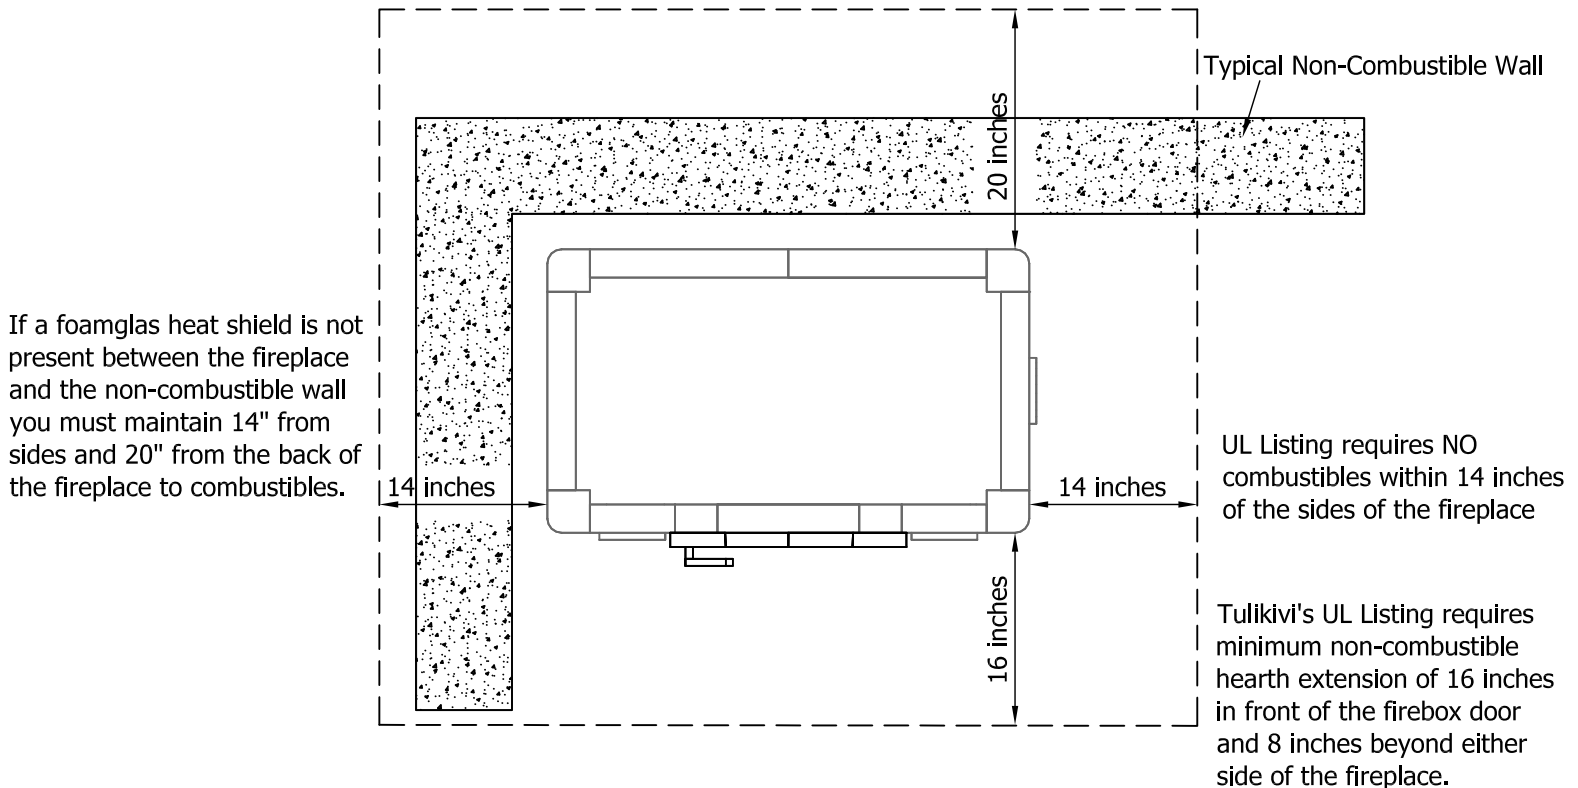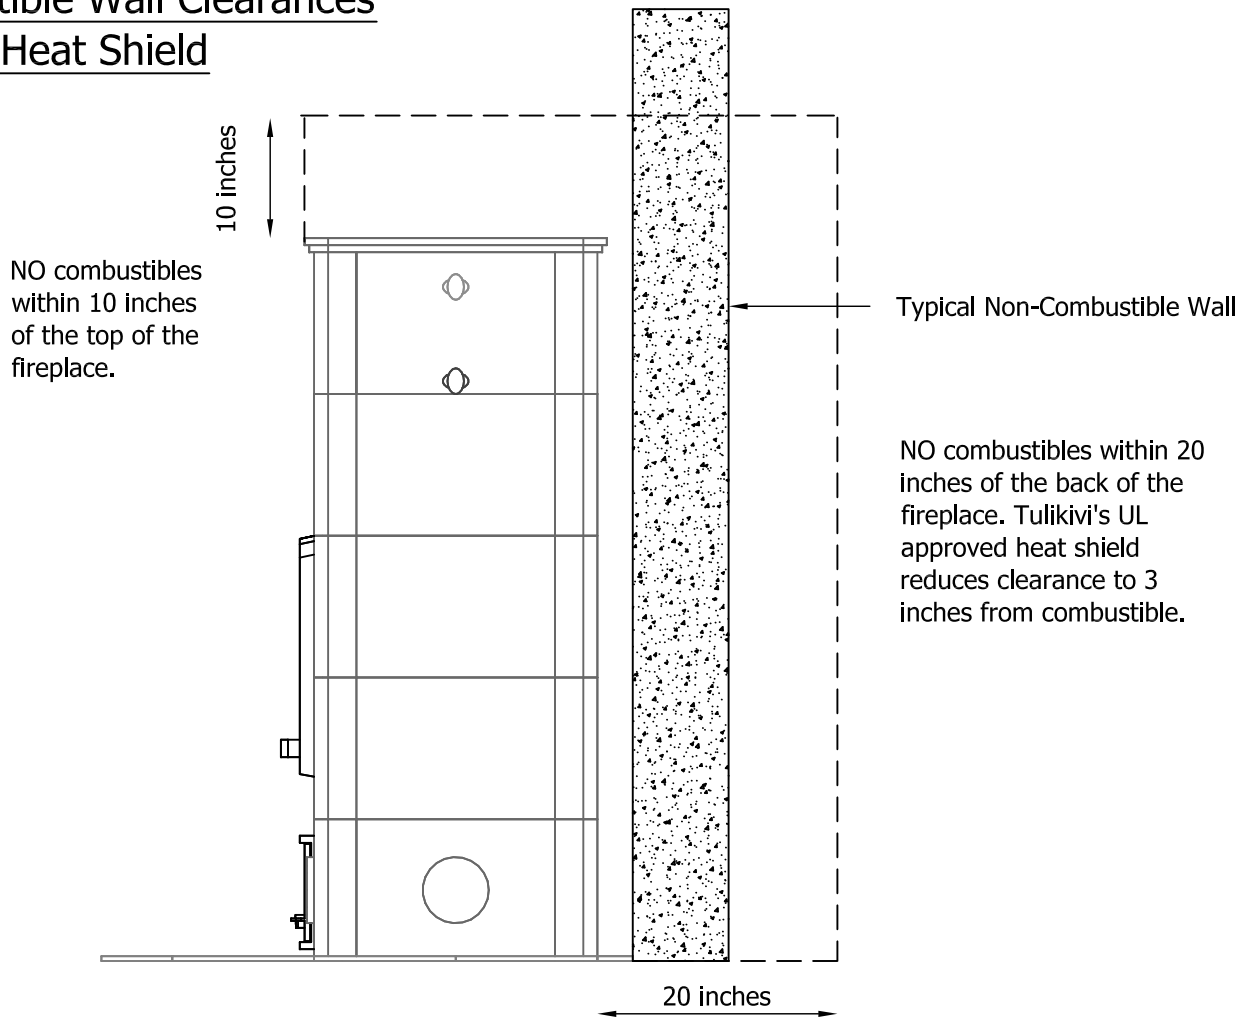


# Central Location Clearances

## NO Heat Shields

NO combustibles within 10 inches of the top of the fireplace.

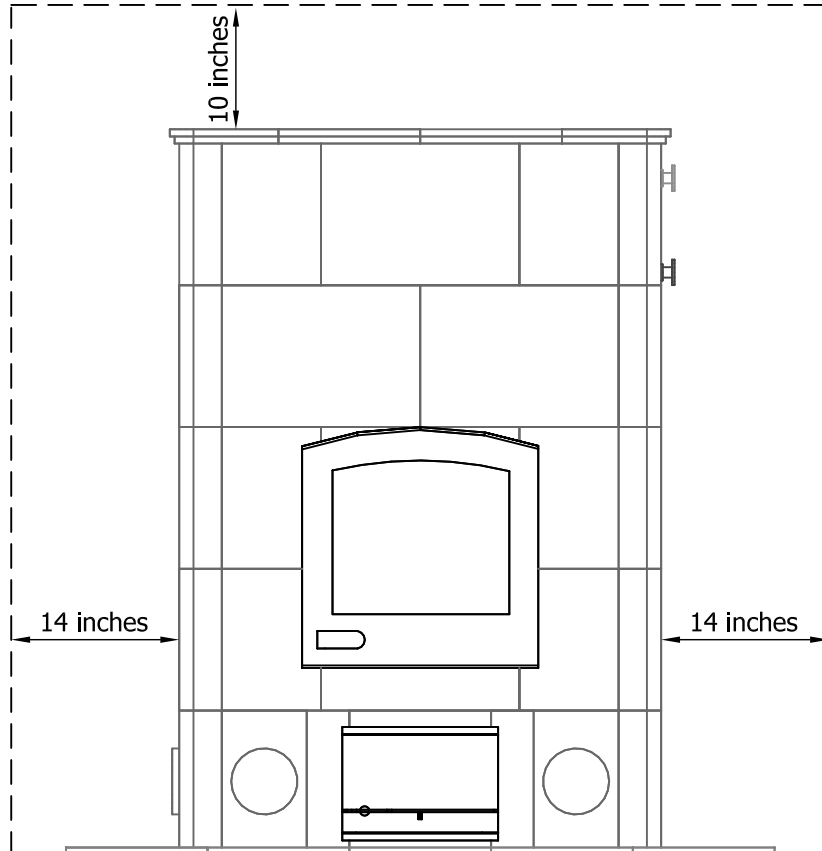

UL Listing requires NO combustibles within 14 inches of the sides of the fireplace

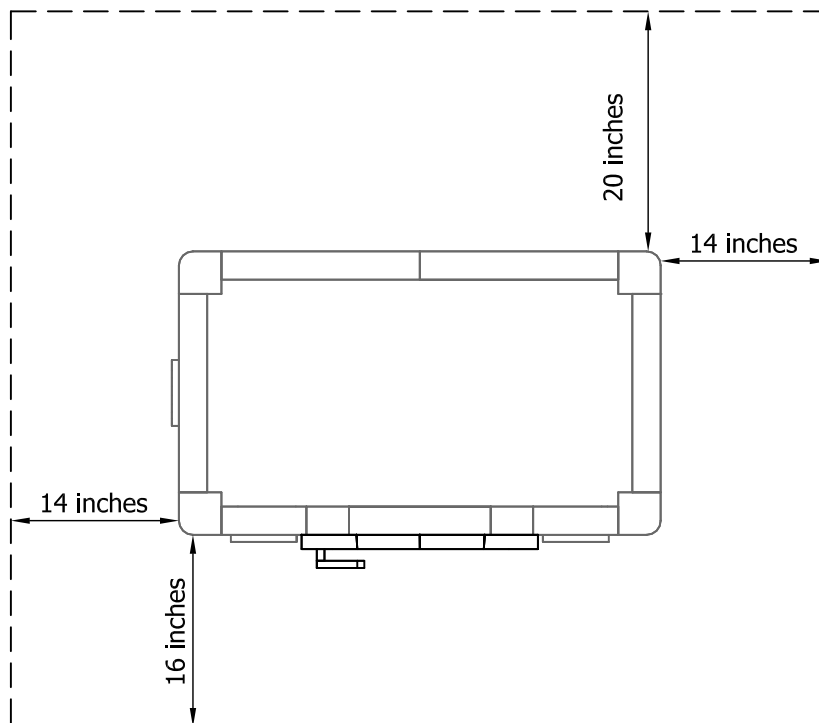

NO combustibles within 20 inches of the back of the fireplace. Tulikivi's UL approved heat shield reduces clearance to 3 inches from combustible.

UL Listing requires NO combustibles within 14 inches of the sides of the fireplace

Tulikivi's UL Listing requires minimum non-combustible hearth extension of 16 inches in front of the firebox door and 8 inches beyond either side of the fireplace.