


NOTE: THERE SHOULD BE CLEAR SPAN UNOBSTRUCTED BY RAFTERS OR RIDGE BEAMS BETWEEN THE TOP OF THE TULIKIVI FIREPLACE AND THE CEILING FOR THE FLUE SYSTEM.
Flue provided by and installed by others

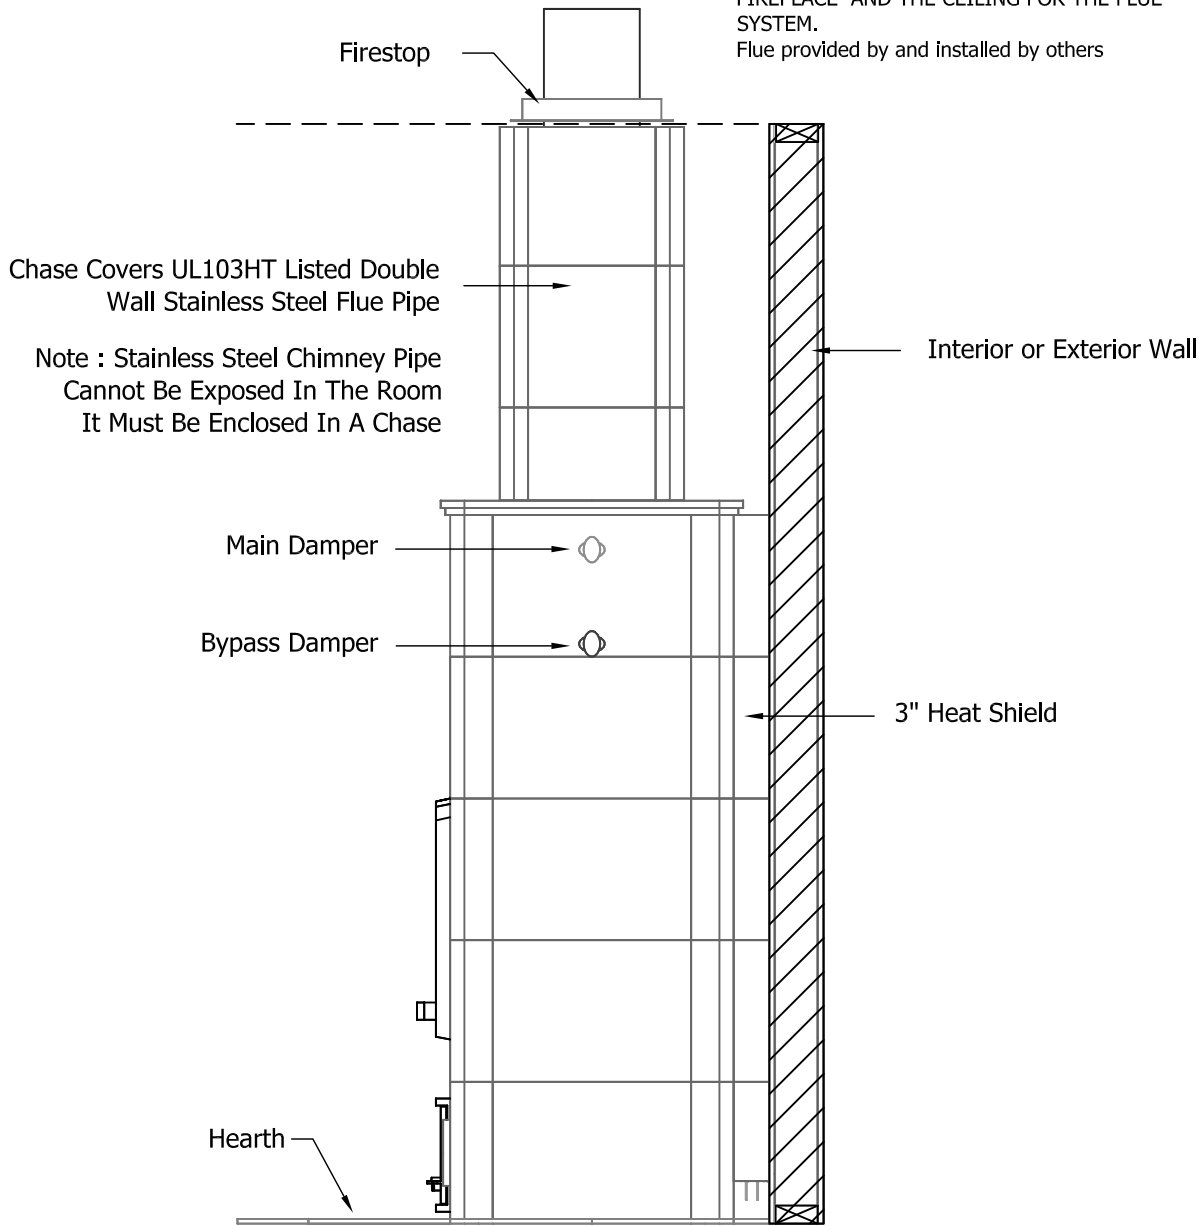

FLOOR SUPPORT:
Owner/Contractor is responsible for engineering support slab or floor under the hearths to support the weight of the Tulikivi Fireplace as specified WITHOUT DEFLECTION.

3 inches